

04

# LINEAR LIGHT

# Table of Contents



## 04 LINEAR LIGHT

TYPE A	03	G5	10
X2	04	G6	11
X4	05	G7	12
T3	06	G8	13
G2	07	G9	14
G3	08	G20	15
G4	09		

# TYPE A


## Surface Mounted LED Linear Light



Surface mounted, TYPE A linear light is designed where recessed installation is not an option. These extrusion is perfect to be installed but not limited to, in any flat surfaces whether it is a ceiling or wall, under or on top of the cabinet, display cases, shelvings and art niches. Installation is simple and easy, Supplied in standard 1m or 2m lengths and cut-lengths can be customised upon request.



### Installation


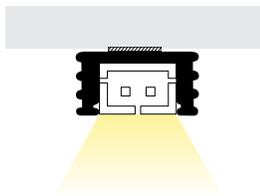


Surface Mounting



Connector

### Dimension

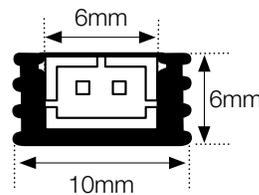

### Accessories



3M Tape



DC Jack



JST




Daisy Chain



Pigtail

### LED Color Temperature

White LED Color Temperature (Standard Color)



### Specifications

Electrical	
Input Voltage	12V / 24V DC Class 2
Power Consumption	Standard : 2.2 w/ft. High - Lumn : 3 w/ft.
Brightness	2,000 Lux to 10,000 Lux
Color Temperature	White LED / R or G or B
CRI	90+

Physical	
Max Length	3.3 ft. (1m)
Weight	66 g/m, 20 g/ft.
Dimension (WxH)	3/8" (10mm) x 1/4" (6mm)
Diffuser	N/A
Environment	-30°C (-22°F) ~ +40°C (+104°F)
Operating Temperature	Dry location only (Indoor)
Warranty	3 Years

# X2


## Corner Mounted LED Linear Light



X2 linear light is very well designed for 90 degree corner installations. Designed to highlight corners, perfect for the joints between walls, cabinets or ceilings and allows a minimalist lighting solution. Installation is simple and easy, Supplied in standard 1m or 2m lengths and cut-lengths can be customised upon request.





### Installation



Corner Mounting

### Dimension

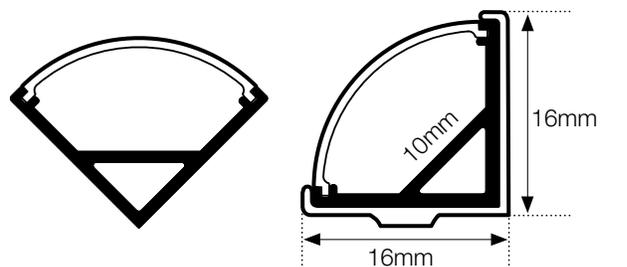

### Accessories

- Frosted Cover
- DC Jack
- Magnet
- JST
- Pigtail
- Clips
- Plastic End Caps
- 3M Tape
- Daisy Chain

### Specifications

Electrical	
Input Voltage	12V / 24V DC Class 2
Power Consumption	Standard : 2.2 w/ft. High - Lumn : 3 w/ft.
Brightness	2,000 Lux to 10,000 Lux
Color Temperature	White LED / Tunable White R or G or B / RGB / RGBW / Digital LED
CRI	90+

### LED Color Temperature

**White LED Color Temperature (Standard Color)**

3000K 4000K 5000K 6500K 10000K

**Tunable White**

3000K 6500K

**RGB** **RGBW** **Digital LED**

Physical	
Max Length	10 ft. (3m)
Weight	118 g/m, 36 g/ft.
Dimension (WxH)	5/8" (16mm) x 5/8" (16mm)
Diffuser	Clear / Frosted
Environment	-30°C (-22°F) ~ +40°C (+104°F)
Operating Temperature	Dry location only (Indoor)
Warranty	3 Years

# X4


## Corner Mounted LED Linear Light



X4 linear light is very well designed for 90 degree corner installations. Designed to highlight corners, perfect for the joints between walls, cabinets or ceilings and allows a minimalist lighting solution. Installation is simple and easy, Supplied in standard 1m or 2m lengths and cut-lengths can be customised upon request.



### Installation



Corner Mounting

### Accessories


- Frosted Cover
- DC Jack
- Magnet
- JST
- Pigtail
- Clips
- Plastic End Caps
- 3M Tape
- Daisy Chain

### Specifications


Electrical	
Input Voltage	12V / 24V DC Class 2
Power Consumption	Standard : 2.2 w/ft. High - Lumn : 3 w/ft.
Brightness	2,000 Lux to 10,000 Lux
Color Temperature	White LED / Tunable White R or G or B / RGB / RGBW / Digital LED
CRI	90+

### Dimension


TYPE A (ROUND)

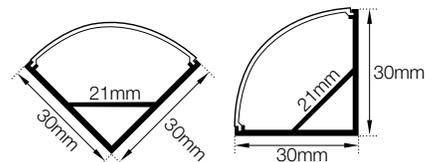

TYPE B (SQUARE)

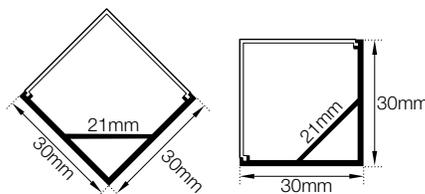

### LED Color Temperature

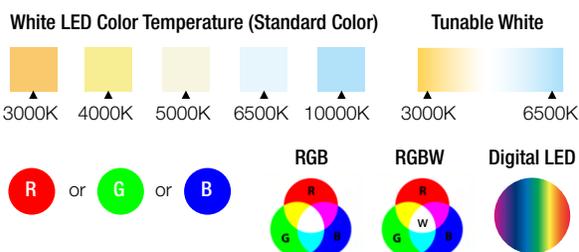

Physical	
Max Length	10 ft. (3m)
Weight	292 g/m, 89 g/ft.
Dimension (WxH)	1-3/16" (30mm) x 1-3/16" (30mm)
Diffuser	Clear / Frosted
Environment	-30°C (-22°F) ~ +40°C (+104°F)
Operating Temperature	Dry location only (Indoor)
Warranty	3 Years

# T3

## Recessed Mounted LED Linear Light



T3 linear light offers a wide variety of quality recessed aluminium extrusions or profiles for LED strip lights. Recessed extrusions can be installed under cabinets, shelves or furniture with the use of double-sided tape or clip. Supplied in standard 1m or 2m lengths and cut-lengths can be customised upon request.




### Installation

#### ▪ Tape





#### ▪ Clip



Recessed Mounting

### Dimension

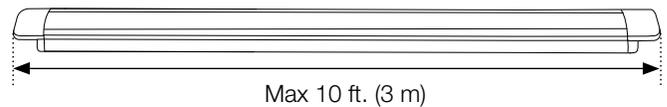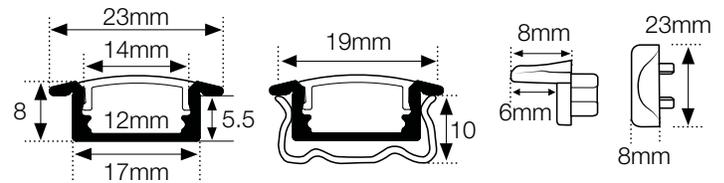


### Accessories

- Frosted Cover
- DC Jack
- Magnet
- Clear Cover
- Pigtail
- JST
- Clips
- Plastic End Caps
- 3M Tape
- Daisy Chain

### Specifications

Electrical	
Input Voltage	12V / 24V DC Class 2
Power Consumption	Standard : 2.2 w/ft. High - Lumn : 3 w/ft.
Brightness	2,000 Lux to 10,000 Lux
Color Temperature	White LED / Tunable White R or G or B / RGB / RGBW / Digital LED
CRI	90+

### LED Color Temperature

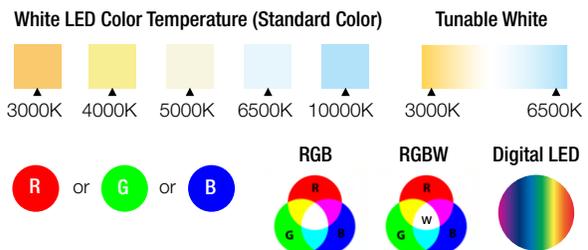


Physical	
Max Length	10 ft. (3m)
Weight	150 g/m, 46 g/ft.
Dimension (WxH)	29/32" (23mm) x 5/16" (8mm)
Diffuser	Clear / Frosted
Environment	-30°C (-22°F) ~ +40°C (+104°F)
Operating Temperature	Dry location only (Indoor)
Warranty	3 Years

# G2


## Surface Mounted LED Linear Light



Surface mounted, the ultra-slim 8mm G2 linear light is ideal where recessed installation is not possible. Perfect for ceilings, walls, cabinets, display cases, shelving, and art niches. Installation is simple, supplied in standard 10ft (3m) lengths, with customizable cut-lengths available upon request.


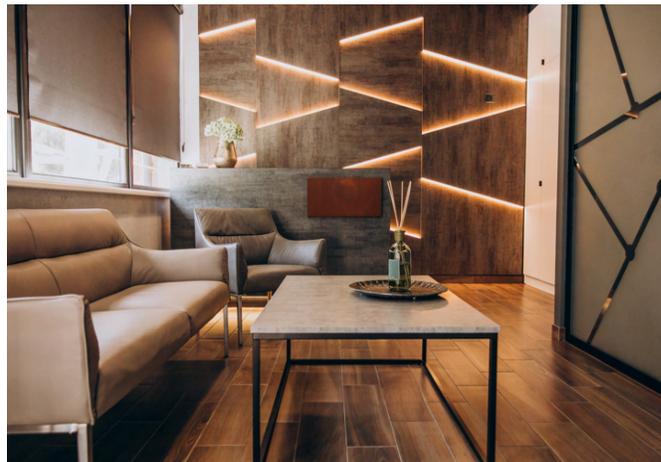


### Installation

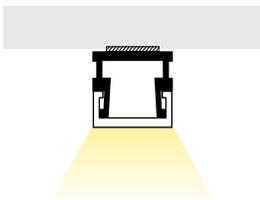

Surface Mounting

### Dimension

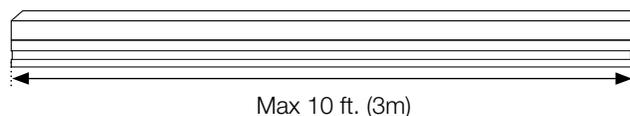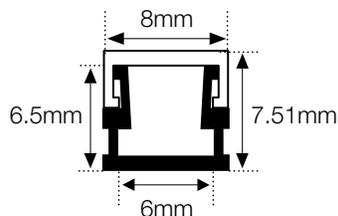


### Accessories

- Frosted Cover
- DC Jack
- Magnet
- JST
- Pigtail
- 3M Tape
- Clips
- Plastic End Caps

### LED Color Temperature

White LED Color Temperature (Standard Color)



### Specifications

Electrical	
Input Voltage	12V / 24V DC Class 2
Power Consumption	Standard : 2.2 w/ft. High - Lumn : 3 w/ft.
Brightness	2,000 Lux to 10,000 Lux
Color Temperature	White LED / R or G or B
CRI	90+

Physical	
Max Length	10 ft. (3m)
Weight	117 g/m, 36 g/ft.
Dimension (WxH)	5/16" (8mm) x 9/32" (7.51mm)
Diffuser	Available
Environment	-30°C (-22°F) ~ +40°C (+104°F)
Operating Temperature	Dry location only (Indoor)
Warranty	3 Years

# G3

## Surface Mounted LED Linear Light



Surface mounted, the ultra-slim 8mm G3 linear light is ideal where recessed installation is not possible. Perfect for ceilings, walls, cabinets, display cases, shelving, and art niches. Installation is simple, supplied in standard 10ft (3m) lengths, with customizable cut-lengths available upon request.




### Installation



Surface Mounting

### Dimension

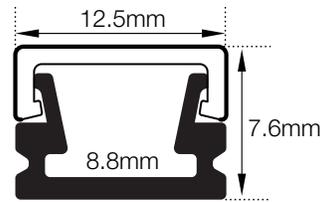

### Accessories

- Frosted Cover
- DC Jack
- Magnet
- JST
- Pigtail
- 3M Tape
- Clips
- Plastic End Caps

### LED Color Temperature

White LED Color Temperature (Standard Color)

- 3000K
- 4000K
- 5000K
- 6500K
- 10000K



### Specifications

Electrical	
Input Voltage	12V / 24V DC Class 2
Power Consumption	Standard : 2.2 w/ft. High - Lumn : 3 w/ft.
Brightness	2,000 Lux to 10,000 Lux
Color Temperature	White LED / R or G or B
CRI	90+


Physical	
Max Length	10 ft. (3m)
Weight	94 g/m, 29 g/ft.
Dimension (WxH)	1/2" (12.5mm) x 5/16" (7.6mm)
Diffuser	Available
Environment	-30°C (-22°F) ~ +40°C (+104°F)
Operating Temperature	Dry location only (Indoor)
Warranty	3 Years

# G4


## Surface Mounted LED Linear Light



Surface mounted, the ultra-slim 8mm G4 linear light is ideal where recessed installation is not possible. Perfect for ceilings, walls, cabinets, display cases, shelving, and art niches. Installation is simple, supplied in standard 10ft (3m) lengths, with customizable cut-lengths available upon request.

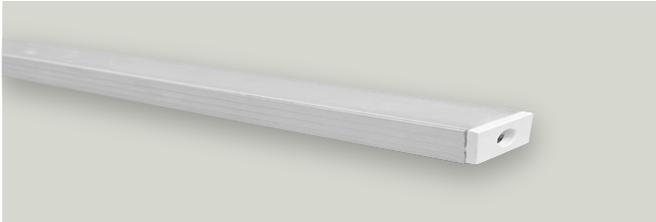


### Installation

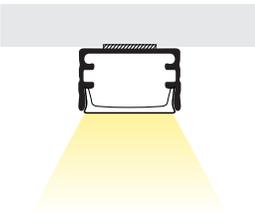

Surface Mounting

### Dimension

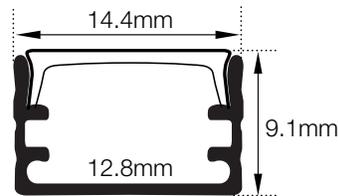


### Accessories

- Frosted Cover
- DC Jack
- Magnet
- JST
- Pigtail
- Clips
- Plastic End Caps
- 3M Tape
- Daisy Chain

### LED Color Temperature

White LED Color Temperature (Standard Color)



### Specifications

Electrical	
Input Voltage	12V / 24V DC Class 2
Power Consumption	Standard : 2.2 w/ft. High - Lumn : 3 w/ft.
Brightness	2,000 Lux to 10,000 Lux
Color Temperature	White LED / Tunable White R or G or B / RGB / RGBW / Digital LED
CRI	90+

Physical	
Max Length	10 ft. (3m)
Weight	90 g/m, 27 g/ft.
Dimension (WxH)	9/16" (14.4mm) x 3/8" (9.1mm)
Diffuser	Available
Environment	-30°C (-22°F) ~ +40°C (+104°F)
Operating Temperature	Dry location only (Indoor)
Warranty	3 Years

# G5


## Surface Mounted LED Linear Light



Surface mounted, the ultra-slim 8mm G5 linear light is ideal where recessed installation is not possible. Perfect for ceilings, walls, cabinets, display cases, shelving, and art niches. Installation is simple, supplied in standard 10ft (3m) lengths, with customizable cut-lengths available upon request.




### Installation

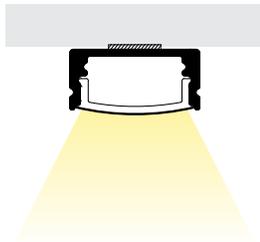

Surface Mounting

### Dimension

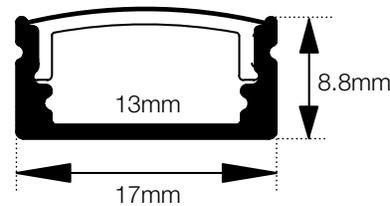


### Accessories

- Frosted Cover
- DC Jack
- Magnet
- Clear Cover
- Pigtail
- JST
- Clips
- Plastic End Caps
- 3M Tape
- Daisy Chain

### LED Color Temperature

White LED Color Temperature (Standard Color)



### Specifications

Electrical	
Input Voltage	12V / 24V DC Class 2
Power Consumption	Standard : 2.2 w/ft. High - Lumn : 3 w/ft.
Brightness	2,000 Lux to 10,000 Lux
Color Temperature	White LED / Tunable White R or G or B / RGB / RGBW / Digital LED
CRI	90+

Physical	
Max Length	10 ft. (3m)
Weight	122 g/m, 37 g/ft.
Dimension (WxH)	11/16" (17mm) x 11/32" (8.8mm)
Diffuser	Available
Environment	-30°C (-22°F) ~ +40°C (+104°F)
Operating Temperature	Dry location only (Indoor)
Warranty	3 Years

# G6


## Surface Mounted LED Linear Light



Surface mounted, the ultra-slim 8mm G6 linear light is ideal where recessed installation is not possible. Perfect for ceilings, walls, cabinets, display cases, shelving, and art niches. Installation is simple, supplied in standard 10ft (3m) lengths, with customizable cut-lengths available upon request.




### Installation

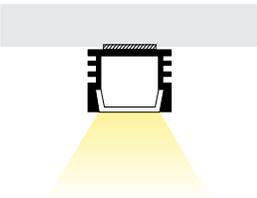

Surface Mounting

### Dimension

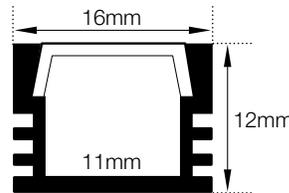


### Accessories

- Frosted Cover
- DC Jack
- Magnet
- JST
- Pigtail
- Clips
- Plastic End Caps
- 3M Tape
- Daisy Chain

### LED Color Temperature

White LED Color Temperature (Standard Color)



### Specifications

Electrical	
Input Voltage	12V / 24V DC Class 2
Power Consumption	Standard : 2.2 w/ft. High - Lumn : 3 w/ft.
Brightness	2,000 Lux to 10,000 Lux
Color Temperature	White LED / Tunable White R or G or B / RGB / RGBW / Digital LED
CRI	90+

Physical	
Max Length	10 ft. (3m)
Weight	163 g/m, 50 g/ft.
Dimension (WxH)	5/8" (16mm) x 15/32" (12mm)
Diffuser	Available
Environment	-30°C (-22°F) ~ +40°C (+104°F)
Operating Temperature	Dry location only (Indoor)
Warranty	3 Years

# G7


## Surface Mounted LED Linear Light



Surface mounted, the ultra-slim 8mm G7 linear light is ideal where recessed installation is not possible. Perfect for ceilings, walls, cabinets, display cases, shelving, and art niches. Installation is simple, supplied in standard 10ft (3m) lengths, with customizable cut-lengths available upon request.




### Installation

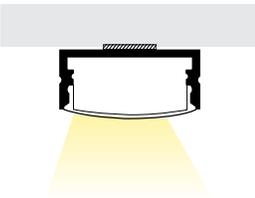

Surface Mounting

### Dimension

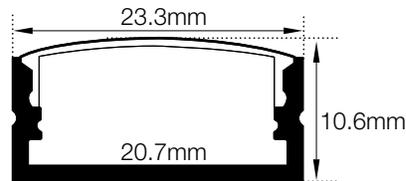


### Accessories

- Frosted Cover
- DC Jack
- Magnet
- JST
- Pigtail
- Clips
- Plastic End Caps
- 3M Tape
- Daisy Chain

### LED Color Temperature

White LED Color Temperature (Standard Color)



### Specifications

Electrical	
Input Voltage	12V / 24V DC Class 2
Power Consumption	Standard : 2.2 w/ft. High - Lumn : 3 w/ft.
Brightness	2,000 Lux to 10,000 Lux
Color Temperature	White LED / Tunable White R or G or B / RGB / RGBW / Digital LED
CRI	90+

Physical	
Max Length	10 ft. (3m)
Weight	150 g/m, 46 g/ft.
Dimension (WxH)	15/16" (23.3mm) x 13/32" (10.6mm)
Diffuser	Available
Environment	-30°C (-22°F) ~ +40°C (+104°F)
Operating Temperature	Dry location only (Indoor)
Warranty	3 Years

# G8

## Surface Mounted LED Linear Light




Surface mounted, the ultra-slim 8mm G8 linear light is ideal where recessed installation is not possible. Perfect for ceilings, walls, cabinets, display cases, shelving, and art niches. Installation is simple, supplied in standard 10ft (3m) lengths, with customizable cut-lengths available upon request.



### Installation



### Dimension

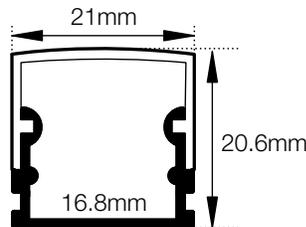


### Accessories

- Frosted Cover
- DC Jack
- Magnet
- JST
- Pigtail
- Clips
- Plastic End Caps
- 3M Tape
- Daisy Chain

### LED Color Temperature

White LED Color Temperature (Standard Color)



### Specifications

Electrical	
Input Voltage	12V / 24V DC Class 2
Power Consumption	Standard : 2.2 w/ft. High - Lumn : 3 w/ft.
Brightness	2,000 Lux to 10,000 Lux
Color Temperature	White LED / Tunable White R or G or B / RGB / RGBW / Digital LED
CRI	90+

Physical	
Max Length	10 ft. (3m)
Weight	194 g/m, 59 g/ft.
Dimension (WxH)	13/16" (21mm) x 13/16" (20.6mm)
Diffuser	Available
Environment	-30°C (-22°F) ~ +40°C (+104°F)
Operating Temperature	Dry location only (Indoor)
Warranty	3 Years

# G9


## Surface Mounted LED Linear Light




Surface mounted, G5 linear light is perfect for where recessed lighting is not an option. The LED strip lights with extrusion housing can help set the mood of each room in homes, offices and retail stores, creating a particular modern flare. Supplied in standard 1m or 2m lengths and cut-lengths can be customised upon request.



### Installation

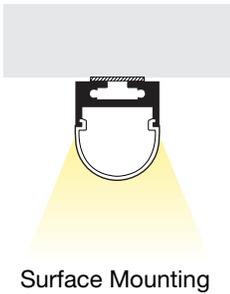


### Dimension

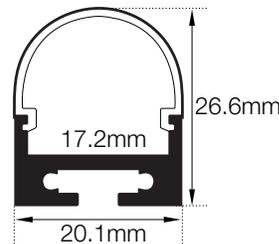

### Accessories

- Frosted Cover
- DC Jack
- Magnet
- JST
- Pigtail
- Clips
- Plastic End Caps
- 3M Tape
- Daisy Chain

### LED Color Temperature

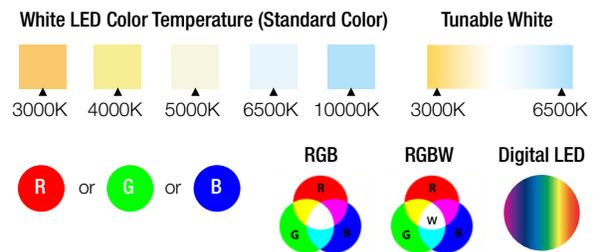

### Specifications

Electrical	
Input Voltage	12V / 24V DC Class 2
Power Consumption	Standard : 2.2 w/ft. High - Lumn : 3 w/ft.
Brightness	2,000 Lux to 10,000 Lux
Color Temperature	White LED / Tunable White R or G or B / RGB / RGBW / Digital LED
CRI	90+

Physical	
Max Length	10 ft. (3m)
Weight	258 g/m, 79 g/ft.
Dimension (WxH)	25/32" (20.1mm) x 1-1/16" (26.6mm)
Diffuser	Clear / Frosted
Environment	-30°C (-22°F) ~ +40°C (+104°F)
Operating Temperature	Dry location only (Indoor)
Warranty	3 Years

# G20


## Surface Mounted LED Linear Light




Surface mounted, G8 linear light is perfect for where recessed lighting is not an option. It comes with a square diffuser for soft direct and indirect lighting. Supplied in standard 1m or 2m lengths. The high quality aluminium extrusion can be cut to length as your require.



### Installation

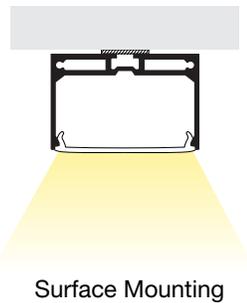


### Dimension

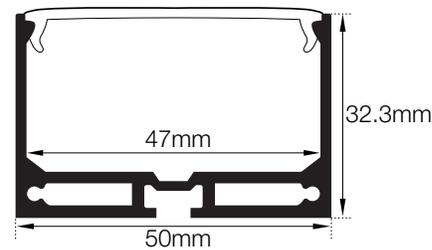

### Accessories

- Frosted Cover
- DC Jack
- Magnet
- JST
- Pigtail
- Clips
- Plastic End Caps
- 3M Tape
- Daisy Chain

### LED Color Temperature

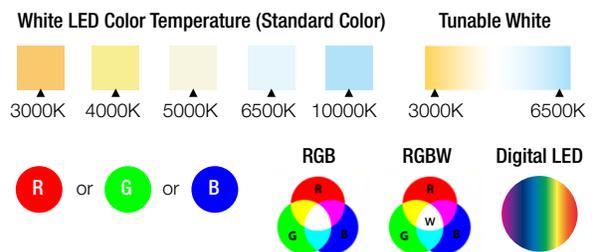

### Specifications

Electrical	
Input Voltage	12V / 24V DC Class 2
Power Consumption	Standard : 2.2 w/ft. High - Lumn : 3 w/ft.
Brightness	2,000 Lux to 10,000 Lux
Color Temperature	White LED / Tunable White R or G or B / RGB / RGBW / Digital LED
CRI	90+

Physical	
Max Length	10 ft. (3m)
Weight	848 g/m, 259 g/ft.
Dimension (WxH)	2" (50mm) x 1-1/4" (32.3mm)
Diffuser	Clear / Frosted
Environment	-30°C (-22°F) ~ +40°C (+104°F)
Operating Temperature	Dry location only (Indoor)
Warranty	3 Years